


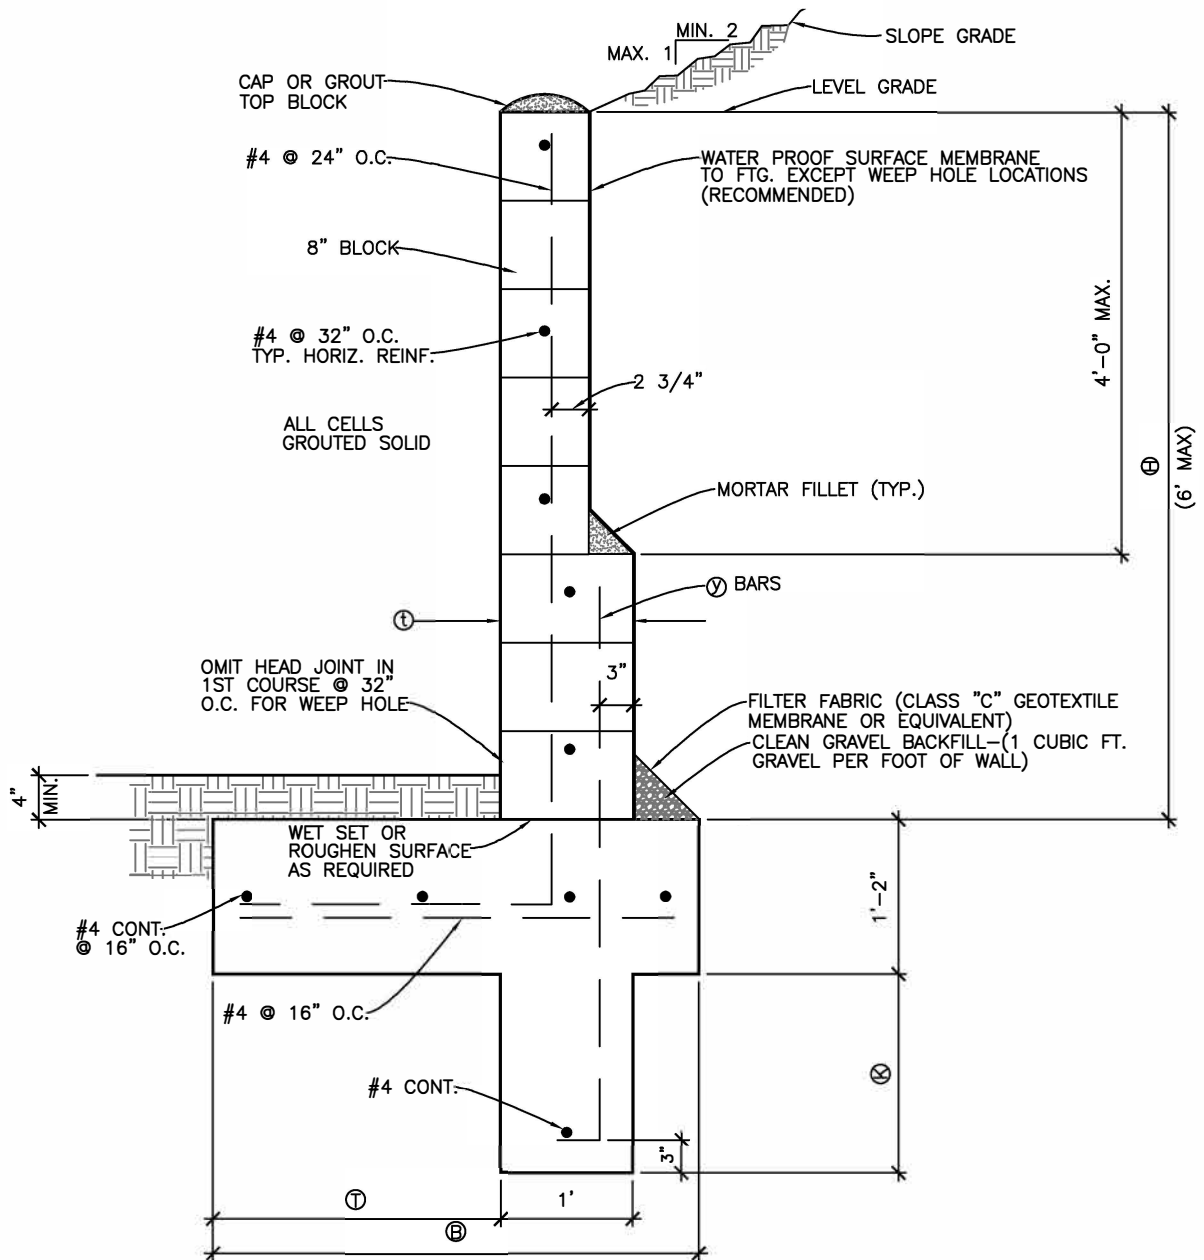

NOTES:

- RETAINING WALL NOT TO BE USED FOR FENCES OR BUILDING FOUNDATION.
- MINIMUM SET BACK FOR STRUCTURES, DRIVEWAYS AND PARKING AREAS FROM RETAINED WALL SHALL BE "H" PLUS 2 FEET.
- SOLID GROUT ALL CELLS WITH OR WITHOUT REBAR.
- FOOTING TO BE CLASS "B" CONCRETE, $f'_c=2,500$ PSI @ 28 DAYS.
- CONCRETE BLOCK - GRADE N UNITS, ASTM C-90, $f'_m=1,500$ PSI.
- MORTAR - TYPE S, 1800 PSI @ 28 DAYS.
- GROUT - 2000 PSI @ 28 DAYS.
- REINFORCING STEEL TO BE GRADE 40.
- REINFORCING BARS SHALL BE SPLICED WITH A MIN. LAP OF 24" AND PLACED PRIOR TO GROUTING.
- SOIL EQUIVALENT FLUID PRESSURE = 45 PCF.
- ALLOWABLE SOIL BEARING PRESSURE = 1,000 PSF.
- ALL FOOTINGS MUST EXTEND AT LEAST 12" INTO UNDISTURBED NATURAL SOIL OR COMPACTED FILL.
- DRAINAGE AND BACKFILL MATERIAL SHALL NOT BE PLACED UNTIL CONCRETE AND/OR MASONRY HAS REACHED DESIGN STRENGTH.
- ALL CONSTRUCTION METHODS SHALL CONFORM TO THE 2022 CBC.

(H)	(t)	(B)	(T)	(K)	VERT. REINF. (BARS)
4' 8"	2'-8"	1'-5"	1'-2"	N/A	
5' 12"	3'-8"	2'-2"	1'-6"	#5@24" o.c.	
6' 12"	4'-2"	2'-5"	2'-0"	#5@16" o.c.	

Revisions		DATE:
Date	Desc	1-06-2014
1/14	CODE	DESIGNED BY:
1/19	CODE NG	A.A.
		DRAWN BY:
		D.M.
		CHECKED BY:
		G.F.

COUNTY OF KERN
STATE OF CALIFORNIA
**BUILDING
INSPECTION
DIVISION**

TYPICAL
RETAINING WALL
DETAIL

K:BuildingDev/Development Review/Development Review/
Development Standards/Retaining Wall-2019 CODE

PLATE NO.
1 OF 1